51411 - YB14L-A2 [12V14Ah]

Dimensions (mm)

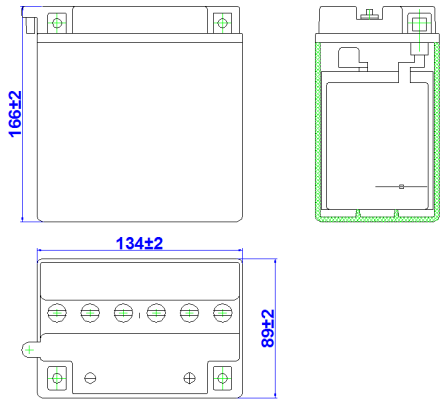

Terminal (mm)

Terminal Type	A

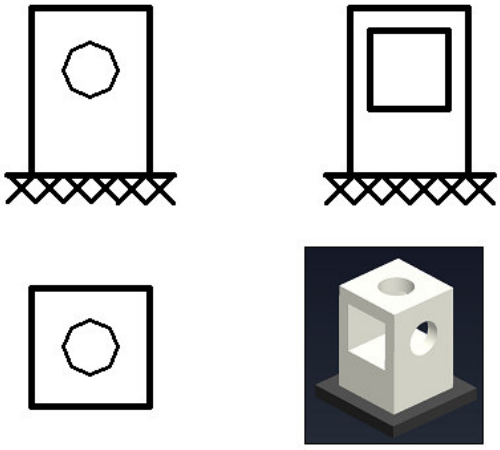

Physical Specifications

Dimensions	Length	134±2mm
	Width	89±2mm
	Height	166±2mm
Weight	Battery(with acid):	Approx 4.5kg
Container & cover material		PP
Chemistry		Lead-Acid
Position of negative terminal		Left
- High Performance motorcycle starter battery		
- Absorbent Glass Mat (AGM) Technology		
- Maintenance free		
- High Cranking Amps		

Discharge Characteristics

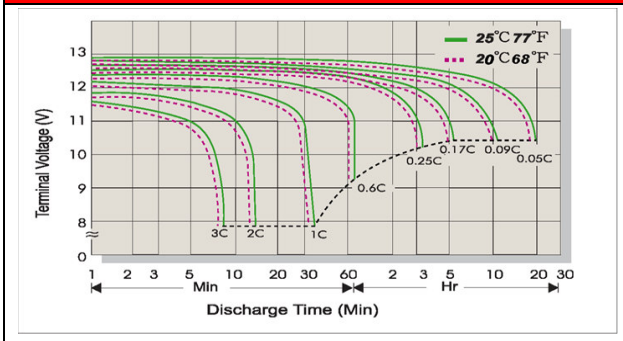

Electrical specifications

Nominal Voltage		12V
Nominal Capacity (C10)		14.0Ah
Cold Cranking Amps (-18°C)		190A
Cycle life (JIS D 5302:2004)		300
Capacity affected by temperature	40°C	104%
	25°C	100%
	0°C	85%
	-15°C	68%
Self Discharge	Approx 4% per month (25°C)	
Charging Method	Constant Voltage Charge	
	Voltage	14.7-15.0V
	MAX. current	4.2A (0.3C10)
	Charging time	6-10 h