




51803E - YTX20CH-BS [12V18Ah]




Dimensions (mm)

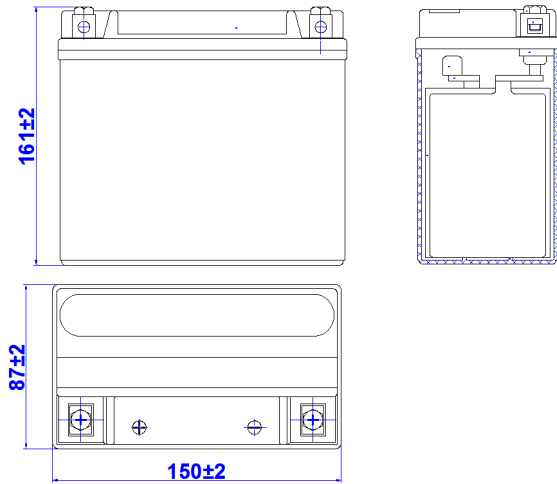

Physical Specifications

Dimensions	Length	150±2mm
	Width	87±2mm
	Height	161±2mm
Weight	Battery(with acid):	Approx 7.0kg
Container & cover material		PP
Chemistry		Lead-Acid
Position of negative terminal		Right
- High Performance motorcycle starter battery		
- Absorbent Glass Mat (AGM) Technology		
- Maintenance free		
- High Cranking Amps		

Discharge Characteristics

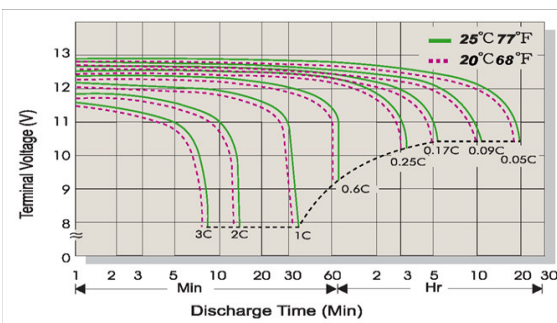

Electrical specifications

Nominal Voltage		12V	
Nominal Capacity (C10)		18.0Ah	
Cold Cranking Amps (-18°C)		270A	
Cycle life (JIS D 5302:2004)		200	
Capacity affected by temperature	40°C	104%	
	25°C	100%	
	0°C	85%	
	-15°C	68%	
Self Discharge		Approx 4% per month (25°C)	
Charging Method	Constant Voltage Charge		
	Voltage	14.7-15.0V	
	MAX. current	5.4A (0.3C10)	
		Charging time	6-10 h