




50314E - YTX4L-BS [12V3Ah]




Dimensions (mm)

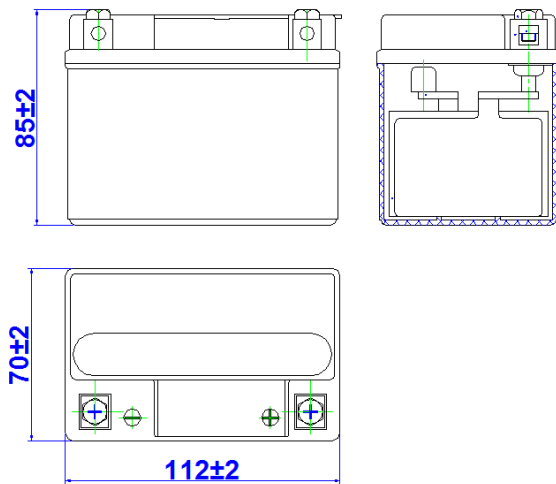

Physical Specifications

Dimensions	Length	112±2mm
	Width	70±2mm
	Height	85±2mm
Weight	Battery(with acid):	Approx 1.4kg
Container & cover material		PP
Chemistry		Lead-Acid
Position of negative terminal		Left
- High Performance motorcycle starter battery		
- Absorbent Glass Mat (AGM) Technology		
- Maintenance free		
- High Cranking Amps		

Discharge Characteristics

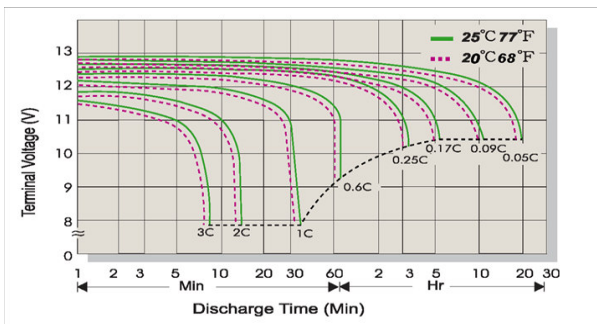

Electrical specifications

Nominal Voltage		12V
Nominal Capacity (C10)		3.0Ah
Cold Cranking Amps (-18°C)		50A
Cycle life (JIS D 5302:2004)		275
Capacity affected by temperature	40°C	104%
	25°C	100%
	0°C	85%
	-15°C	68%
Self Discharge		Approx 4% per month (25°C)
Charging Method	Constant Voltage Charge	
	Voltage	14.7-15.0V
	MAX. current	0.9A (0.3C10)
Charging time		6-10 h